


# GEC Durham Industries, Inc.

## TYPE TAB

INSTRUMENT CURRENT TRANSFORMER  
600 VOLT CLASS MINIATURE BAR TYPE

### Standard features:

60 Hertz, 600 VAC, 10KV Bil.  
Clear sealable secondary terminal cover.  
Retained shorting device.  
#6-14 Potential terminal.  
Tinned plated copper bus bar.  
Certified test record with each transformer.  
Meets ANSI, NEMA and EEI standards.

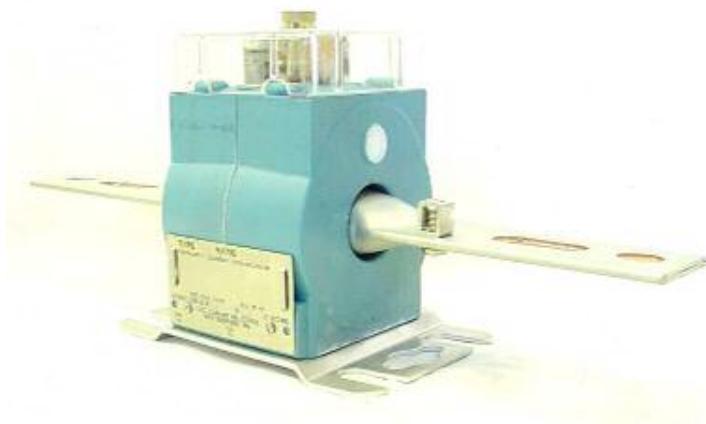

TYPE TAB WITH STUD TYPE SECONDARY TERMINALS MOUNTING BASE NOT INCLUDED							
MODEL	PRIMARY AMPS	CATALOG NUMBER	BURDEN 0.3 ACCURACY CLASS	30 C RATING FACTOR	55 C RATING FACTOR	FIGURE	WEIGHT
TAB21	200	205E	0.5	2.0	1.5	1	5 lbs
TAB31	300	206E	0.5	2.0	1.5	2	6 lbs
TAB41	400	207E	0.5	2.0	1.5	2	6 lbs
TAB61	600	208E	0.5	2.0	1.5	7	7 lbs
TAB81	800	209E	0.5	1.5	1.1	7	7 lbs

TYPE TAB WITH STUD TYPE SECONDARY TERMINALS ALUMINUM LOW MOUNTING BASE INCLUDED							
MODEL	PRIMARY AMPS	CATALOG NUMBER	BURDEN 0.3 ACCURACY CLASS	30 C RATING FACTOR	55 C RATING FACTOR	FIGURE	WEIGHT
TAB21	200	205KBR	0.5	2.0	1.5	3	5 lbs
TAB31	300	206KBR	0.5	2.0	1.5	4	6 lbs
TAB41	400	207KBR	0.5	2.0	1.5	4	6 lbs
TAB61	600	208KBR	0.5	2.0	1.5	8	7 lbs
TAB81	800	209KBR	0.5	1.5	1.1	8	7 lbs

Specifications subject to change without notice


5/26/04

<b>TYPE TAB</b> <b>WITH STUD TYPE SECONDARY TERMINALS</b> <b>ALUMINUM 2" HIGH MOUNTING BASE INCLUDED</b>							
MODEL	PRIMARY AMPS	CATALOG NUMBER	BURDEN 0.3 ACCURACY CLASS	30 C RATING FACTOR	55 C RATING FACTOR	FIGURE	WEIGHT
TAB21	200	205KH	0.5	2.0	1.5	5	5 lbs
TAB31	300	206KH	0.5	2.0	1.5	6	6 lbs
TAB41	400	207KH	0.5	2.0	1.5	6	6 lbs
TAB61	600	208KH	0.5	2.0	1.5	7	7 lbs
TAB81	800	209KH	0.5	1.5	1.1	9	7 lbs

<b>TYPE TAB</b> <b>WITH PRESSURE TYPE SECONDARY TERMINALS</b> <b>MOUNTING BASE NOT INCLUDED</b>							
MODEL	PRIMARY AMPS	CATALOG NUMBER	BURDEN 0.3 ACCURACY CLASS	30 C RATING FACTOR	55 C RATING FACTOR	FIGURE	WEIGHT
TAB21	200	205EP	0.5	2.0	1.5	1	5 lbs
TAB31	300	206EP	0.5	2.0	1.5	2	6 lbs
TAB41	400	207EP	0.5	2.0	1.5	2	6 lbs
TAB61	600	208EP	0.5	2.0	1.5	7	7 lbs
TAB81	800	209EP	0.5	1.5	1.1	7	7 lbs

<b>TYPE TAB</b> <b>WITH PRESSURE TYPE SECONDARY TERMINALS</b> <b>ALUMINUM LOW MOUNTING BASE INCLUDED</b>							
MODEL	PRIMARY AMPS	CATALOG NUMBER	BURDEN 0.3 ACCURACY CLASS	30 C RATING FACTOR	55 C RATING FACTOR	FIGURE	WEIGHT
TAB21	200	205KRP	0.5	2.0	1.5	3	5 lbs
TAB31	300	206KRP	0.5	2.0	1.5	4	6 lbs
TAB41	400	207KRP	0.5	2.0	1.5	4	6 lbs
TAB61	600	208KRP	0.5	2.0	1.5	8	7 lbs
TAB81	800	209KRP	0.5	1.5	1.1	8	7 lbs

<b>TYPE TAB</b> <b>WITH PRESSURE TYPE SECONDARY TERMINALS</b> <b>ALUMINUM 2" HIGH MOUNTING BASE INCLUDED</b>							
MODEL	PRIMARY AMPS	CATALOG NUMBER	BURDEN 0.3 ACCURACY CLASS	30 C RATING FACTOR	55 C RATING FACTOR	FIGURE	WEIGHT
TAB21	200	205KHP	0.5	2.0	1.5	5	5 lbs
TAB31	300	206KHP	0.5	2.0	1.5	6	6 lbs
TAB41	400	207KHP	0.5	2.0	1.5	6	6 lbs
TAB61	600	208KHP	0.5	2.0	1.5	9	7 lbs
TAB81	800	209KHP	0.5	1.5	1.1	9	7 lbs

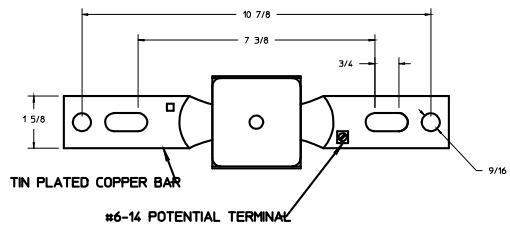

#6-14 POTENTIAL TERMINAL


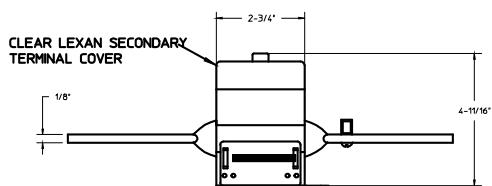


Figure 1

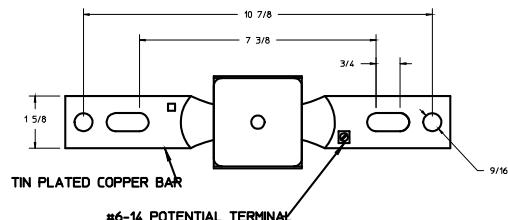

#6-14 POTENTIAL TERMINAL

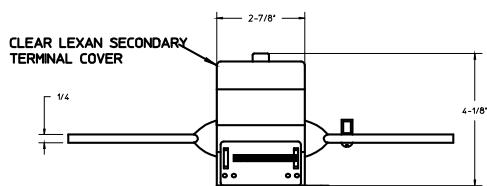


Figure 2

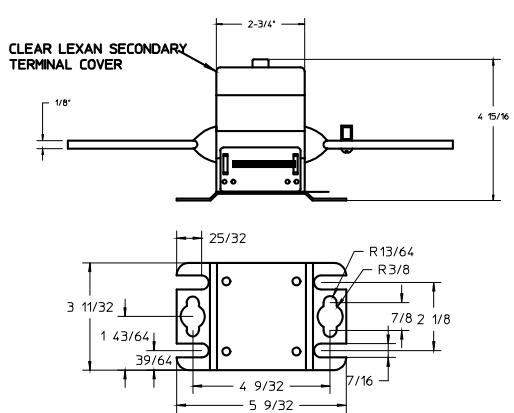


Figure 3

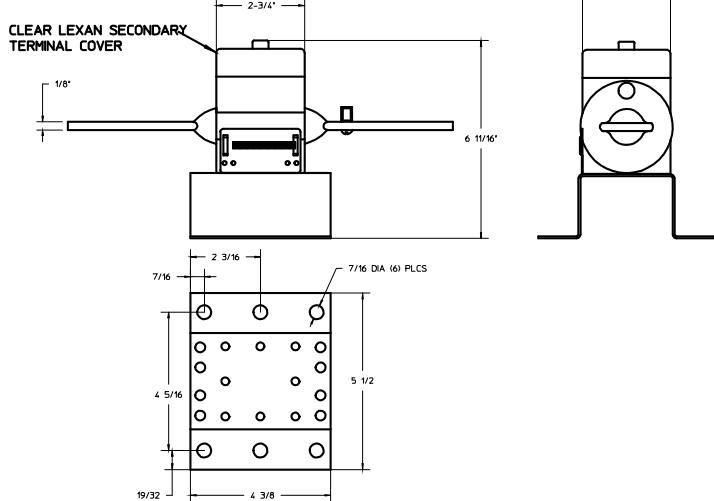


Figure 5

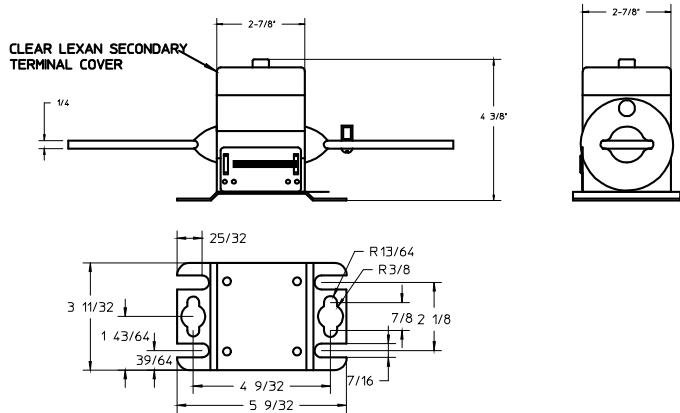


Figure 4

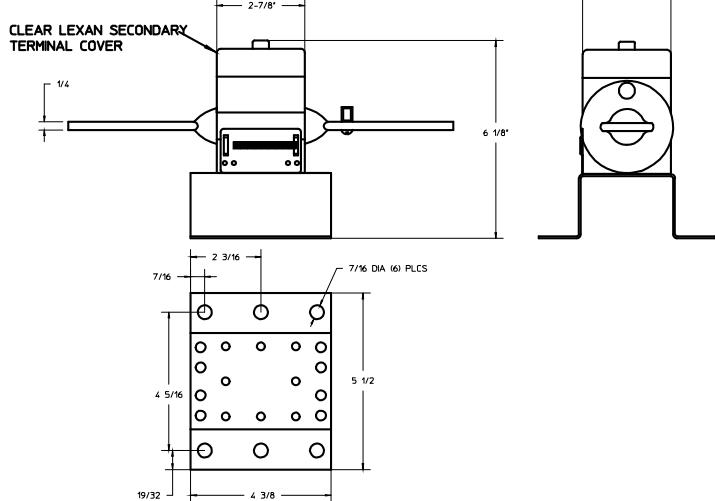


Figure 6

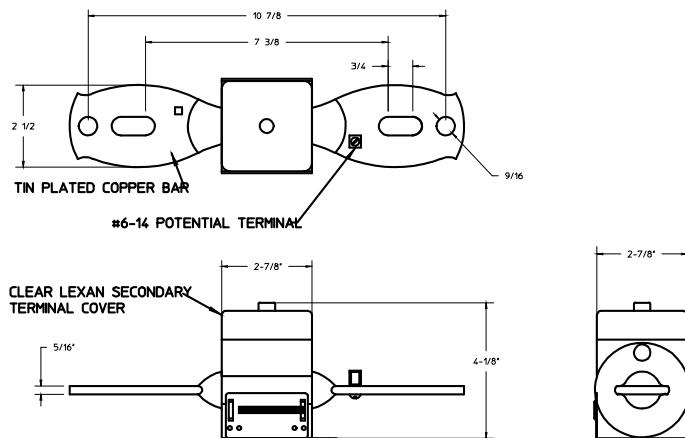


Figure 7

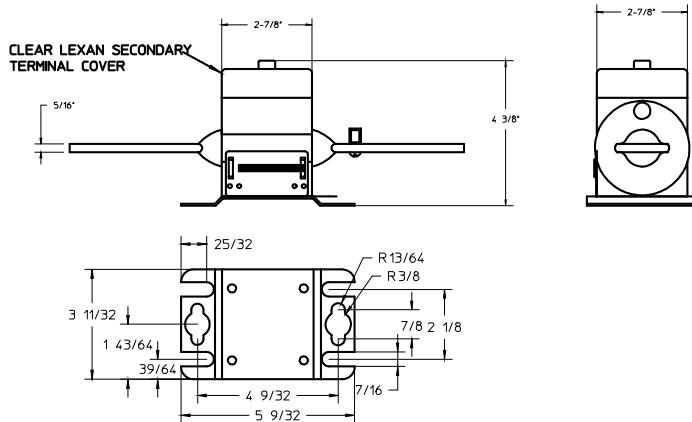


Figure 8

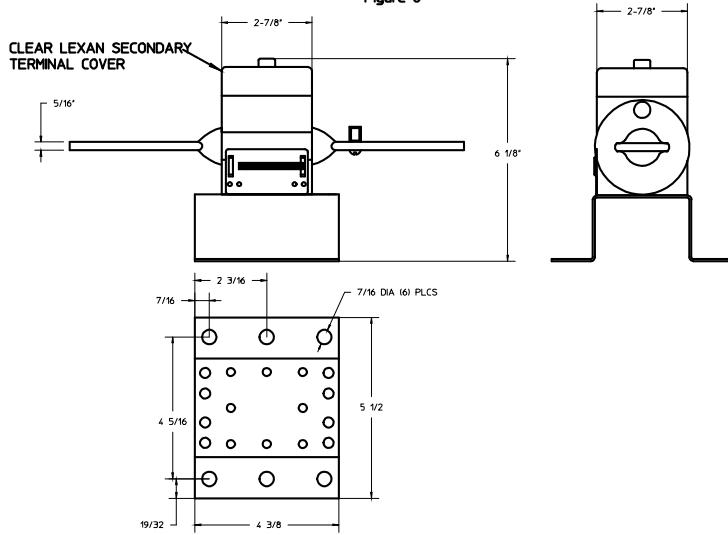


Figure 9